



Boric Oxide

Anhydrous Boric Acid

Product Profile



Anhydrous Boric Acid

CAS/TSCA Number 1303-86-2

Technical Grade:
4-Mesh and 60-Mesh

Boric oxide, the pure form of B_2O_3 , is a hard glassy material, granular in texture. Exposed to the atmosphere it slowly absorbs water, reverting to boric acid. It is soluble in water but at a much slower rate than boric acid. Approximately 56.3 kg of boric oxide are the chemical equivalent of 100 kg of boric acid.

Boric oxide is used where B_2O_3 is required without the presence of sodium or calcium and/or where water would be detrimental to the process.

Applications and Benefits

Specialty glasses

Pure B_2O_3 is needed for the production of certain types of glasses including optical and telescope lenses, medical glasses (ampoules), electronic glasses and glass-ceramic composites. The general benefits of using B_2O_3 in glass formulations are reduction of melting temperature, increased thermal resistance and mechanical strength, and enhanced aqueous and chemical durability.

Specialty ceramics

Boric oxide is used to produce various types of high strength and heat-resistant ceramic products such as boron carbide, boron nitride, titanium and zirconium diborides, as well as elemental boron.

Refractories

It is used in the manufacture of chemically bonded firebricks and castables which require resistance to high temperature, abrasion and corrosion. Boric oxide is used as a binder for magnesia-based refractory bricks and as a stabilizer for dolomite refractory bricks commonly used in steel smelting furnaces.

Glazes and enamels

Boric oxide increases the strength, scratch resistance, and chemical resistance of ceramic wares such as wall and floor tiles, tableware and porcelain, and of enamelled appliances. Generally, boric oxide which has a capacity to increase yields is used for a combination of reasons, the final glaze or enamel benefiting from its influence on both the melting and physical properties of the product.

Chemical reactions

Boric oxide is used in the preparation of boron halides, sodium borohydride, metallic borates, and borate esters. It is also used as a catalyst in the conversion and synthesis of many organic compounds.


Metallurgy

Boric oxide is an excellent solvent for metallic oxides at high temperatures. In the field of metallurgy, boric oxide is used in the preparation of special welding and soldering fluxes, in chemical-bonded refractories, in the hardening of steel, and in the production of alloys with iron, nickel or manganese. It is also used to produce amorphous metal and rare-earth magnets



Boric oxide improves resistance of glass to aqueous and chemical attack as weight loss tests show.

From Glass by Horst Scholze 1991

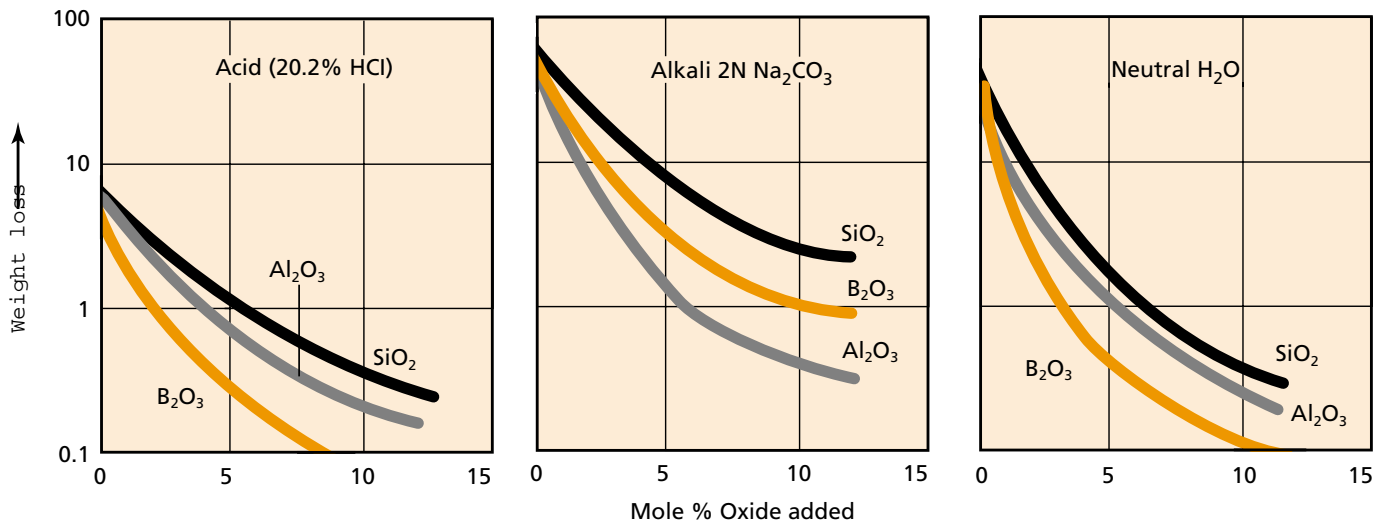

Physical and Chemical Properties

The normal glassy form of boric oxide has no definite melting point. It begins to soften at about 325°C (617°F). Two crystalline forms can be obtained under high pressure. One of these can also be made at atmospheric pressure. The melting point of the latter has been reported as 450°±2°C if made at atmospheric pressure and 465°±10°C if made at high pressure.

Characteristics

Molecular Weight	69.62
Specific Gravity	1.84
Melting Point	450-465°C (842-869°F)
Heat of Solution (absorbed)	4.90x10 ⁵ J/kg (210 BTU/lb)

Stability

Boric oxide is a hygroscopic product. Care should therefore be taken to avoid exposure to water or humidity, as this may cause caking. If wetted it reacts exothermically, forming boric acid. Also, it is, of course, essential to maintain the integrity of the packaging.

Notice:

Before using these products, please read the Product Specifications, the Safety Data Sheets and any other applicable product literature.

The descriptions of potential uses for these products are provided only by way of example. The products are not intended or recommended for any unlawful or prohibited use including, without limitation, any use that would constitute infringement of any applicable patents. Nor is it intended or recommended that the products be used for any described purposes without verification by the user of the products' safety and efficacy for such purposes, as well as ensuring compliance with all applicable laws, regulations and registration requirements. Suggestions for use of these products are based on data believed to be reliable. The seller shall have no liability resulting from misuse of the products and provides no guarantee, whether expressed or implied, as to the results obtained if the products are not used in accordance with directions or safe practices. The buyer assumes all responsibility, including any injury or damage, resulting from misuse of the product, whether used alone or in combination with other materials. THE SELLER MAKES NO EXPRESS OR IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THE SELLER SHALL HAVE NO LIABILITY FOR CONSEQUENTIAL DAMAGES.

Borax Asia Pte. Ltd.
501 Orchard Road
#08-02 Wheelock Place
Singapore 238880
Tel: (65) 738 6068
Fax: (65) 738 6282

Borax Europe Limited
1A Guildford Business Park
Guildford, GU2 8XG
United Kingdom
Tel: (44) 1483 242000
Fax: (44) 1483 242001

U.S. Borax Inc.
26877 Tourney Road
Valencia, California, 91355-1847
United States
Tel: (1) 661 287 5400
Fax: (1) 661 287 5495

A member of the Rio Tinto Group

www.borax.com